

Installation and Operating Instructions

Premier Technologies Multiple Play Unit

MPU 3200 Series



Important

Before using the Premier Multiple Play Unit, please read these operating instructions carefully.

Introduction

The MPU 3200 Multiple Play Unit can record and play up to six different messages of varying length as long as the total message length does not exceed the memory of the device. Included with the 3200 is a six foot color coded cable, wiring instructions for the cable, a six foot RCA cable, and a power cable.

Dealer Service

A network of authorized Premier Technologies dealers can provide service backed by Premier's technical staff. For the name of your local dealer or for technical assistance from Premier Technologies, contact:
Premier Technologies, Inc.
One Premier Drive • P.O. Box 159
Long Lake, MN 55356 • (952) 475-2317


(800) 466-8642 • FAX (952) 475-357

Specifications

Sampling Rate:	64 kbps (effective 96 kbps).
Recording Times:	2 minutes up to 47 minutes (model dependent).
Frequency Response:	200 Hz to 3400 Hz (+ or - 1dB)
Flash Memory:	Nonvolatile, unaffected by power interruptions, no matter how long the unit is without power.
Power Source:	12V AC adaptor, included.
Audio Output:	600 Ohm & 8 Ohm (Note: 8 Ohm output has a 5 watt amplifier).
Tone Control:	Controls the tone on the 8 Ohm and 600 Ohm outputs.
Verbal Prompting:	Assists with loading.
Working Temp:	From +5°C to + 35°C (40°F to 95°F)
Dimensions:	5.25"H x 8.5"W x 5"D
Weight:	6 lbs. (Boxed)

Operating Controls and Indicators

- ① Power - LED - indicates power to the unit.
Note: When power is first applied to the unit, it will blink first, and then remain steady.
- ② Output Tone - Controls the tone on the 600 Ohm and 8 Ohm speakers.
- ③ Output Volume - Controls the output volume of the unit.
- ④ Speaker - Turns on and off internal speaker. Push once (switch stays down) to turn speaker on push again (switch comes up) to turn speaker off.
- ⑤ Phone Outputs - Insert the cable provided into the output jack your phone system requires, either 600 Ohm or 8 Ohm.
- ⑥ AC Adaptor Jack - Insert round plug of 12VAC adaptor into jack to power unit.

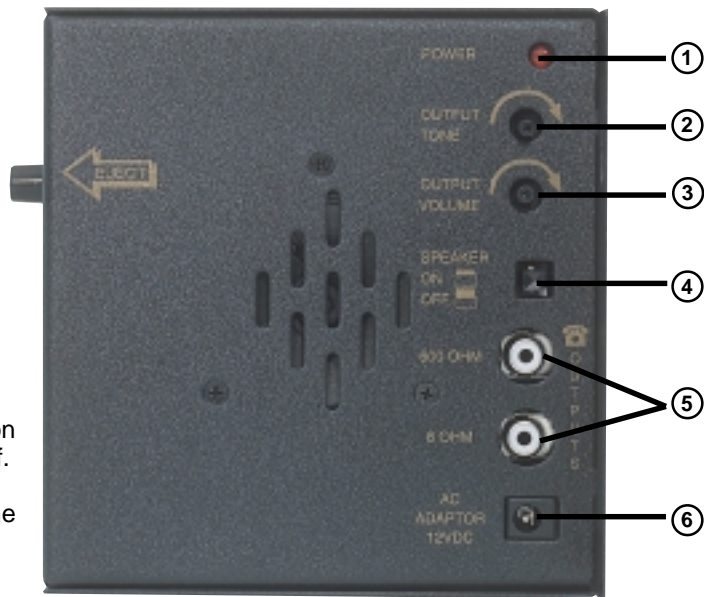

NOTE: DIN socket on opposite side of unit.

Installation

1. Connect the color coded ends of the cable assembly to the dry contacts (switches) per the enclosed diagram. The closure of these contacts triggers playing of the selected message.
2. Plug the other end of the color coded cable assembly into the DIN connector located on the left side of the MPU 3200, paying attention to the notch in the cable.
IMPORTANT: DO NOT supply external voltage to this cable assembly.
3. Plug the RCA cable into the speaker or other audio load where the messages will be heard. Plug the other end of the cable into the 8 ohm or 600 ohm audio output jack on the side of the 3200.
4. Plug the small connector end of the AC adaptor into the 12VDC jack located on the right side of the unit. Plug the AC adaptor into a grounded AC power outlet.
5. To download your messages from the tape, press the eject button on the face of the 3200. The cassette door will open and a voice will guide you through the process.
6. Recording of messages – It is important to leave between five to 15 seconds of silence between the messages on the tape. The 3200 begins recording when it first detects sound on the tape and stops when it detects three seconds of silence. The unit will again begin recording the next message on the tape when sound is again detected. The entire sequence will be stopped when 20 seconds of consecutive silence is detected.
7. Push the button speaker to turn on/off the internal speaker.
(Note: The speaker button only controls the internal speaker)
8. Adjust volume and tone as needed.

Warranty

Upon receipt, Premier Technologies, Inc. will repair or replace, as its option, for a period of three years from the date of installation, any IOH 3000 that proves defective in materials or workmanship. Premier Technologies, Inc. is not liable for indirect, incidental, or consequential damages in connection with the use of this product. This limited warranty does not include labor for installation or removal of a defective unit.

FCC Information

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against interference when the equipment is operated in a commercial environment.

The user is cautioned that changes or modifications not expressly approved by Premier Technologies, Inc. could void the user's authority to operate the equipment.